


Wymiary prętowych elementów łączących niestandardowych typ AD – BWT

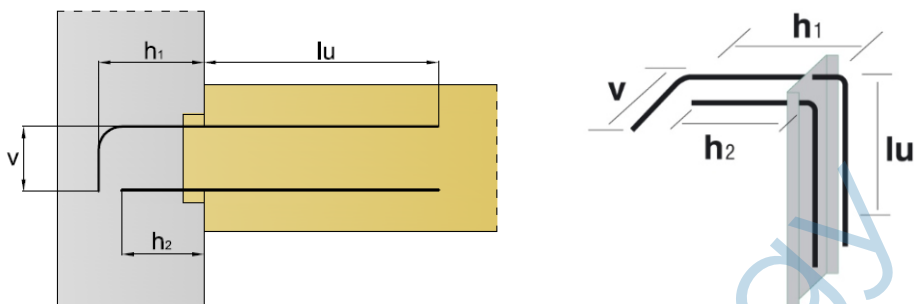

Oznaczenie elementu	Średnica pręta	Rozstaw prętów T, mm	lu, mm	h ₁ , h ₂ , mm	v, mm	Szerokość szyny S, mm	Długość szyny L, mm
1	2	3	5	6	7	8	9
BWT 1200815 HAD	8	150	70 ÷ 510	70 ÷ 500	70 ÷ 500	122	200 ÷ 2400
BWT 1200820 HAD	8	200	70 ÷ 600	70 ÷ 500	70 ÷ 500	122	200 ÷ 2400
BWT 1200825 HAD	8	250	70 ÷ 600	70 ÷ 500	70 ÷ 500	122	200 ÷ 2400
BWT 1201015 HAD	10	150	90 ÷ 510	90 ÷ 500	90 ÷ 500	122	200 ÷ 2400
BWT 1201020 HAD	10	200	90 ÷ 600	90 ÷ 500	90 ÷ 500	122	200 ÷ 2400
BWT 1201025 HAD	10	250	90 ÷ 600	90 ÷ 500	90 ÷ 500	122	200 ÷ 2400
BWT 1201215 HAD	12	150	110 ÷ 390	110 ÷ 500	110 ÷ 500	122	200 ÷ 2400
BWT 1201220 HAD	12	200	110 ÷ 440	110 ÷ 500	110 ÷ 500	122	200 ÷ 2400
BWT 1201225 HAD	12	250	110 ÷ 490	110 ÷ 500	110 ÷ 500	122	200 ÷ 2400
BWT 1500815 HAD	8	150	70 ÷ 510	70 ÷ 500	70 ÷ 500	150	200 ÷ 2400
BWT 1500820 HAD	8	200	70 ÷ 600	70 ÷ 500	70 ÷ 500	150	200 ÷ 2400
BWT 1500825 HAD	8	250	70 ÷ 600	70 ÷ 500	70 ÷ 500	150	200 ÷ 2400
BWT 1501010 HAD	10	100	90 ÷ 360	90 ÷ 500	90 ÷ 500	150	200 ÷ 2400
BWT 1501015 HAD	10	150	90 ÷ 510	90 ÷ 500	90 ÷ 500	150	200 ÷ 2400
BWT 1501020 HAD	10	200	90 ÷ 600	90 ÷ 500	90 ÷ 500	150	200 ÷ 2400
BWT 1501025 HAD	10	250	90 ÷ 600	90 ÷ 500	90 ÷ 500	150	200 ÷ 2400
BWT 1501210 HAD	12	100	110 ÷ 310	110 ÷ 500	110 ÷ 500	150	200 ÷ 2400
BWT 1501215 HAD	12	150	110 ÷ 480	110 ÷ 500	110 ÷ 500	150	200 ÷ 2400
BWT 1501220 HAD	12	200	110 ÷ 530	110 ÷ 500	110 ÷ 500	150	200 ÷ 2400
BWT 1501225 HAD	12	250	110 ÷ 580	110 ÷ 500	110 ÷ 500	150	200 ÷ 2400
BWT 1700815 HAD	8	150	70 ÷ 510	70 ÷ 500	70 ÷ 500	168	200 ÷ 2400
BWT 1700820 HAD	8	200	70 ÷ 600	70 ÷ 500	70 ÷ 500	168	200 ÷ 2400

Oznaczenie elementu	Średnica pręta	Rozstaw prętów T, mm	lu, mm	h ₁ , h ₂ , mm	v, mm	Szerokość szyny S, mm	Długość szyny L, mm
1	2	3	5	6	7	8	9
BWT 1701010 HAD	10	100	90 ÷ 430	90 ÷ 500	90 ÷ 500	168	200 ÷ 2400
BWT 1701015 HAD	10	150	90 ÷ 510	90 ÷ 500	90 ÷ 500	168	200 ÷ 2400
BWT 1701020 HAD	10	200	90 ÷ 600	90 ÷ 500	90 ÷ 500	168	200 ÷ 2400
BWT 1701025 HAD	10	250	90 ÷ 600	90 ÷ 500	90 ÷ 500	168	200 ÷ 2400
BWT 1701210 HAD	12	100	110 ÷ 370	110 ÷ 500	110 ÷ 500	168	200 ÷ 2400
BWT 1701215 HAD	12	150	110 ÷ 495	110 ÷ 500	110 ÷ 500	168	200 ÷ 2400
BWT 1701220 HAD	12	200	110 ÷ 565	110 ÷ 500	110 ÷ 500	168	200 ÷ 2400
BWT 1701225 HAD	12	250	110 ÷ 590	110 ÷ 500	110 ÷ 500	168	200 ÷ 2400
BWT 1900815 HAD	8	150	70 ÷ 510	70 ÷ 500	70 ÷ 500	186	200 ÷ 2400
BWT 1900820 HAD	8	200	70 ÷ 600	70 ÷ 500	70 ÷ 500	186	200 ÷ 2400
BWT 1900825 HAD	8	250	70 ÷ 600	70 ÷ 500	70 ÷ 500	186	200 ÷ 2400
BWT 1901010 HAD	10	100	90 ÷ 500	90 ÷ 500	90 ÷ 500	186	200 ÷ 2400
BWT 1901015 HAD	10	150	90 ÷ 510	90 ÷ 500	90 ÷ 500	186	200 ÷ 2400
BWT 1901020 HAD	10	200	90 ÷ 600	90 ÷ 500	90 ÷ 500	186	200 ÷ 2400
BWT 1901025 HAD	10	250	90 ÷ 600	90 ÷ 500	90 ÷ 500	186	200 ÷ 2400
BWT 1901210 HAD	12	100	110 ÷ 430	110 ÷ 500	110 ÷ 500	186	200 ÷ 2400
BWT 1901215 HAD	12	150	110 ÷ 510	110 ÷ 500	110 ÷ 500	186	200 ÷ 2400
BWT 1901220 HAD	12	200	110 ÷ 600	110 ÷ 500	110 ÷ 500	186	200 ÷ 2400
BWT 1901225 HAD	12	250	110 ÷ 600	110 ÷ 500	110 ÷ 500	186	200 ÷ 2400
BWT 2200815 HAD	8	150	70 ÷ 600	70 ÷ 500	70 ÷ 500	222	200 ÷ 2400
BWT 2200820 HAD	8	200	70 ÷ 600	70 ÷ 500	70 ÷ 500	222	200 ÷ 2400
BWT 2200825 HAD	8	250	70 ÷ 600	70 ÷ 500	70 ÷ 500	222	200 ÷ 2400
BWT 2201010 HAD	10	100	90 ÷ 600	90 ÷ 500	90 ÷ 500	222	200 ÷ 2400
BWT 2201015 HAD	10	150	90 ÷ 600	90 ÷ 500	90 ÷ 500	222	200 ÷ 2400
BWT 2201020 HAD	10	200	90 ÷ 600	90 ÷ 500	90 ÷ 500	222	200 ÷ 2400
BWT 2201025 HAD	10	250	90 ÷ 600	90 ÷ 500	90 ÷ 500	222	200 ÷ 2400
BWT 2201210 HAD	12	100	110 ÷ 600	110 ÷ 500	110 ÷ 500	222	200 ÷ 2400
BWT 2201215 HAD	12	150	110 ÷ 600	110 ÷ 500	110 ÷ 500	222	200 ÷ 2400
BWT 2201220 HAD	12	200	110 ÷ 600	110 ÷ 500	110 ÷ 500	222	200 ÷ 2400
BWT 2201225 HAD	12	250	110 ÷ 600	110 ÷ 500	110 ÷ 500	222	200 ÷ 2400
BWT 2400815 HAD	8	150	70 ÷ 600	70 ÷ 500	70 ÷ 500	242	200 ÷ 2400
BWT 2400820 HAD	8	200	70 ÷ 600	70 ÷ 500	70 ÷ 500	242	200 ÷ 2400
BWT 2400825 HAD	8	250	70 ÷ 600	70 ÷ 500	70 ÷ 500	242	200 ÷ 2400

Oznaczenie elementu	Średnica pręta	Rozstaw prętów T, mm	lu, mm	h ₁ , h ₂ , mm	v, mm	Szerokość szyny S, mm	Długość szyny L, mm
1	2	3	5	6	7	8	9
BWT 2401010 HAD	10	100	90 ÷ 600	90 ÷ 500	90 ÷ 500	242	200 ÷ 2400
BWT 2401015 HAD	10	150	90 ÷ 600	90 ÷ 500	90 ÷ 500	242	200 ÷ 2400
BWT 2401020 HAD	10	200	90 ÷ 600	90 ÷ 500	90 ÷ 500	242	200 ÷ 2400
BWT 2401025 HAD	10	250	90 ÷ 600	90 ÷ 500	90 ÷ 500	242	200 ÷ 2400
BWT 2401210 HAD	12	100	110 ÷ 600	110 ÷ 500	110 ÷ 500	242	200 ÷ 2400
BWT 2401215 HAD	12	150	110 ÷ 600	110 ÷ 500	110 ÷ 500	242	200 ÷ 2400
BWT 2401220 HAD	12	200	110 ÷ 600	110 ÷ 500	110 ÷ 500	242	200 ÷ 2400
BWT 2401225 HAD	12	250	110 ÷ 600	110 ÷ 500	110 ÷ 500	242	200 ÷ 2400
Dopuszczalne odchyłki wymiarów, mm	-	± 5	± 20	± 15	± 15	± 5	± 20

BWB technology