


Wymiary prętowych elementów łączących niestandardowych typ DD – BWT

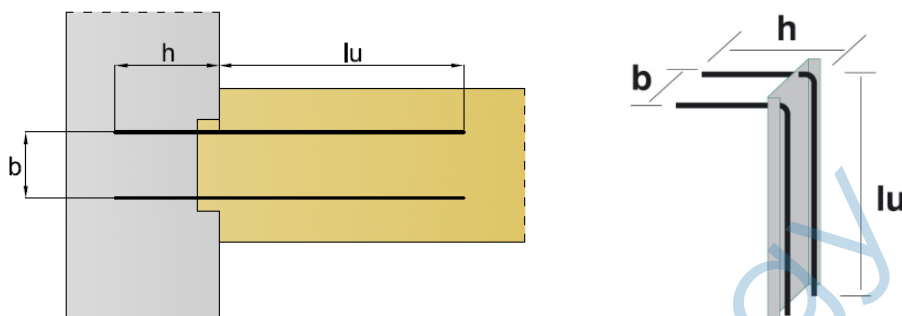

Oznaczenie elementu	Średnica pręta	Rozstaw prętów T, mm	lu, mm	h, mm	b, mm	Szerokość szyny S, mm	Długość szyny L, mm
1	2	3	4	5	6	7	8
BWT 1200815 HDD	8	150	70 ÷ 510	70 ÷ 500	88	122	200 ÷ 2400
BWT 1200820 HDD	8	200	70 ÷ 600	70 ÷ 500	88	122	200 ÷ 2400
BWT 1200825 HDD	8	250	70 ÷ 600	70 ÷ 500	88	122	200 ÷ 2400
BWT 1201015 HDD	10	150	90 ÷ 510	90 ÷ 500	90	122	200 ÷ 2400
BWT 1201020 HDD	10	200	90 ÷ 600	90 ÷ 500	90	122	200 ÷ 2400
BWT 1201025 HDD	10	250	90 ÷ 600	90 ÷ 500	90	122	200 ÷ 2400
BWT 1201215 HDD	12	150	110 ÷ 390	110 ÷ 500	92	122	200 ÷ 2400
BWT 1201220 HDD	12	200	110 ÷ 440	110 ÷ 500	92	122	200 ÷ 2400
BWT 1201225 HDD	12	250	110 ÷ 490	110 ÷ 500	92	122	200 ÷ 2400
BWT 1500815 HDD	8	150	70 ÷ 510	70 ÷ 500	116	150	200 ÷ 2400
BWT 1500820 HDD	8	200	70 ÷ 600	70 ÷ 500	116	150	200 ÷ 2400
BWT 1500825 HDD	8	250	70 ÷ 600	70 ÷ 500	116	150	200 ÷ 2400
BWT 1501010 HDD	10	100	90 ÷ 360	90 ÷ 500	118	150	200 ÷ 2400
BWT 1501015 HDD	10	150	90 ÷ 510	90 ÷ 500	118	150	200 ÷ 2400
BWT 1501020 HDD	10	200	90 ÷ 600	90 ÷ 500	118	150	200 ÷ 2400
BWT 1501025 HDD	10	250	90 ÷ 600	90 ÷ 500	118	150	200 ÷ 2400
BWT 1501210 HDD	12	100	110 ÷ 310	110 ÷ 500	120	150	200 ÷ 2400
BWT 1501215 HDD	12	150	110 ÷ 480	110 ÷ 500	120	150	200 ÷ 2400
BWT 1501220 HDD	12	200	110 ÷ 530	110 ÷ 500	120	150	200 ÷ 2400
BWT 1501225 HDD	12	250	110 ÷ 580	110 ÷ 500	120	150	200 ÷ 2400
BWT 1700815 HDD	8	150	70 ÷ 510	70 ÷ 500	134	168	200 ÷ 2400
BWT 1700820 HDD	8	200	70 ÷ 600	70 ÷ 500	134	168	200 ÷ 2400

Oznaczenie elementu	Średnica pręta	Rozstaw prętów T, mm	lu, mm	h, mm	b, mm	Szerokość szyny S, mm	Długość szyny L, mm
1	2	3	4	5	6	7	8
BWT 1700825 HDD	8	250	70 ÷ 600	70 ÷ 500	134	168	200 ÷ 2400
BWT 1701010 HDD	10	100	90 ÷ 430	90 ÷ 500	136	168	200 ÷ 2400
BWT 1701015 HDD	10	150	90 ÷ 510	90 ÷ 500	136	168	200 ÷ 2400
BWT 1701020 HDD	10	200	90 ÷ 600	90 ÷ 500	136	168	200 ÷ 2400
BWT 1701025 HDD	10	250	90 ÷ 600	90 ÷ 500	136	168	200 ÷ 2400
BWT 1701210 HDD	12	100	110 ÷ 370	110 ÷ 500	136	168	200 ÷ 2400
BWT 1701215 HDD	12	150	110 ÷ 495	110 ÷ 500	138	168	200 ÷ 2400
BWT 1701220 HDD	12	200	110 ÷ 565	110 ÷ 500	138	168	200 ÷ 2400
BWT 1701225 HDD	12	250	110 ÷ 590	110 ÷ 500	138	168	200 ÷ 2400
BWT 1900815 HDD	8	150	70 ÷ 510	70 ÷ 500	152	186	200 ÷ 2400
BWT 1900820 HDD	8	200	70 ÷ 600	70 ÷ 500	152	186	200 ÷ 2400
BWT 1900825 HDD	8	250	70 ÷ 600	70 ÷ 500	152	186	200 ÷ 2400
BWT 1901010 HDD	10	100	90 ÷ 500	90 ÷ 500	154	186	200 ÷ 2400
BWT 1901015 HDD	10	150	90 ÷ 510	90 ÷ 500	154	186	200 ÷ 2400
BWT 1901020 HDD	10	200	90 ÷ 600	90 ÷ 500	154	186	200 ÷ 2400
BWT 1901025 HDD	10	250	90 ÷ 600	90 ÷ 500	154	186	200 ÷ 2400
BWT 1901210 HDD	12	100	110 ÷ 430	110 ÷ 500	156	186	200 ÷ 2400
BWT 1901215 HDD	12	150	110 ÷ 510	110 ÷ 500	156	186	200 ÷ 2400
BWT 1901220 HDD	12	200	110 ÷ 600	110 ÷ 500	156	186	200 ÷ 2400
BWT 1901225 HDD	12	250	110 ÷ 600	110 ÷ 500	156	186	200 ÷ 2400
BWT 2200815 HDD	8	150	70 ÷ 600	70 ÷ 500	188	222	200 ÷ 2400
BWT 2200820 HDD	8	200	70 ÷ 600	70 ÷ 500	188	222	200 ÷ 2400
BWT 2200825 HDD	8	250	70 ÷ 600	70 ÷ 500	188	222	200 ÷ 2400
BWT 2201010 HDD	10	100	90 ÷ 600	90 ÷ 500	190	222	200 ÷ 2400
BWT 2201015 HDD	10	150	90 ÷ 600	90 ÷ 500	190	222	200 ÷ 2400
BWT 2201020 HDD	10	200	90 ÷ 600	90 ÷ 500	190	222	200 ÷ 2400
BWT 2201025 HDD	10	250	90 ÷ 600	90 ÷ 500	190	222	200 ÷ 2400
BWT 2201210 HDD	12	100	110 ÷ 600	110 ÷ 500	192	222	200 ÷ 2400
BWT 2201215 HDD	12	150	110 ÷ 600	110 ÷ 500	192	222	200 ÷ 2400
BWT 2201220 HDD	12	200	110 ÷ 600	110 ÷ 500	192	222	200 ÷ 2400
BWT 2201225 HDD	12	250	110 ÷ 600	110 ÷ 500	192	222	200 ÷ 2400
BWT 2400815 HDD	8	150	70 ÷ 600	70 ÷ 500	208	242	200 ÷ 2400
BWT 2400820 HDD	8	200	70 ÷ 600	70 ÷ 500	208	242	200 ÷ 2400

Oznaczenie elementu	Średnica pręta	Rozstaw prętów T, mm	lu, mm	h, mm	b, mm	Szerokość szyny S, mm	Długość szyny L, mm
1	2	3	4	5	6	7	8
BWT 2400825 HDD	8	250	70 ÷ 600	70 ÷ 500	208	242	200 ÷ 2400
BWT 2401010 HDD	10	100	90 ÷ 600	90 ÷ 500	210	242	200 ÷ 2400
BWT 2401015 HDD	10	150	90 ÷ 600	90 ÷ 500	210	242	200 ÷ 2400
BWT 2401020 HDD	10	200	90 ÷ 600	90 ÷ 500	210	242	200 ÷ 2400
BWT 2401025 HDD	10	250	90 ÷ 600	90 ÷ 500	210	242	200 ÷ 2400
BWT 2401210 HDD	12	100	110 ÷ 600	110 ÷ 500	212	242	200 ÷ 2400
BWT 2401215 HDD	12	150	110 ÷ 600	110 ÷ 500	212	242	200 ÷ 2400
BWT 2401220 HDD	12	200	110 ÷ 600	110 ÷ 500	212	242	200 ÷ 2400
BWT 2401225 HDD	12	250	110 ÷ 600	110 ÷ 500	212	242	200 ÷ 2400
Dopuszczalne odchyłki wymiarów:	-	± 5 mm	± 20 mm	± 15 mm	± 15 mm	± 5 mm	± 20 mm