


Wymiary prętowych elementów łączących niestandardowych typ K – BWT

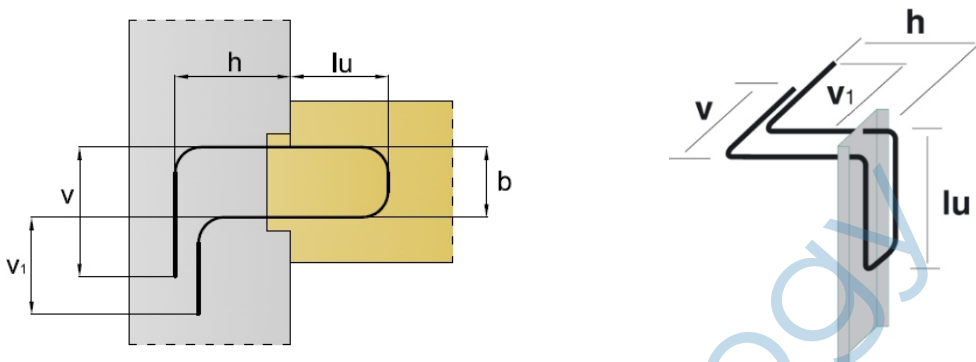

Oznaczenie elementu	Średnica pręta	Rozstaw prętów T, mm	lu, mm	h, mm	v, v ₁ , mm	Szerokość szyny S, mm	Długość szyny L, mm
1	2	3	4	5	6	7	8
BWT 1200815 HK	8	150	70 ÷ 175	70 ÷ 500	70 ÷ 500	122	200 ÷ 2400
BWT 1200820 HK	8	200	70 ÷ 235	70 ÷ 500	70 ÷ 500	122	200 ÷ 2400
BWT 1200825 HK	8	250	70 ÷ 290	70 ÷ 500	70 ÷ 500	122	200 ÷ 2400
BWT 1201015 HK	10	150	90 ÷ 130	90 ÷ 500	90 ÷ 500	122	200 ÷ 2400
BWT 1201020 HK	10	200	90 ÷ 180	90 ÷ 500	90 ÷ 500	122	200 ÷ 2400
BWT 1201025 HK	10	250	90 ÷ 230	90 ÷ 500	90 ÷ 500	122	200 ÷ 2400
BWT 1201215 HK	12	150	110 ÷ 120	110 ÷ 500	110 ÷ 500	122	200 ÷ 2400
BWT 1201220 HK	12	200	110 ÷ 170	110 ÷ 500	110 ÷ 500	122	200 ÷ 2400
BWT 1201225 HK	12	250	110 ÷ 220	110 ÷ 500	110 ÷ 500	122	200 ÷ 2400
BWT 1500815 HK	8	150	70 ÷ 280	70 ÷ 500	70 ÷ 500	150	200 ÷ 2400
BWT 1500820 HK	8	200	70 ÷ 340	70 ÷ 500	70 ÷ 500	150	200 ÷ 2400
BWT 1500825 HK	8	250	70 ÷ 410	70 ÷ 500	70 ÷ 500	150	200 ÷ 2400
BWT 1501010 HK	10	100	90 ÷ 160	90 ÷ 500	90 ÷ 500	150	200 ÷ 2400
BWT 1501015 HK	10	150	90 ÷ 250	90 ÷ 500	90 ÷ 500	150	200 ÷ 2400
BWT 1501020 HK	10	200	90 ÷ 260	90 ÷ 500	90 ÷ 500	150	200 ÷ 2400
BWT 1501025 HK	10	250	90 ÷ 320	90 ÷ 500	90 ÷ 500	150	200 ÷ 2400
BWT 1501210 HK	12	100	110	110 ÷ 500	110 ÷ 500	150	200 ÷ 2400
BWT 1501215 HK	12	150	110 ÷ 155	110 ÷ 500	110 ÷ 500	150	200 ÷ 2400
BWT 1501220 HK	12	200	110 ÷ 210	110 ÷ 500	110 ÷ 500	150	200 ÷ 2400
BWT 1501225 HK	12	250	110 ÷ 260	110 ÷ 500	110 ÷ 500	150	200 ÷ 2400
BWT 1700815 HK	8	150	70 ÷ 375	70 ÷ 500	70 ÷ 500	168	200 ÷ 2400
BWT 1700820 HK	8	200	70 ÷ 450	70 ÷ 500	70 ÷ 500	168	200 ÷ 2400

Oznaczenie elementu	Średnica pręta	Rozstaw prętów T, mm	lu, mm	h, mm	v, v ₁ , mm	Szerokość szyny S, mm	Długość szyny L, mm
1	2	3	4	5	6	7	8
BWT 1700825 HK	8	250	70 ÷ 505	70 ÷ 500	70 ÷ 500	168	200 ÷ 2400
BWT 1701010 HK	10	100	90 ÷ 245	90 ÷ 500	90 ÷ 500	168	200 ÷ 2400
BWT 1701015 HK	10	150	90 ÷ 300	90 ÷ 500	90 ÷ 500	168	200 ÷ 2400
BWT 1701020 HK	10	200	90 ÷ 365	90 ÷ 500	90 ÷ 500	168	200 ÷ 2400
BWT 1701025 HK	10	250	90 ÷ 425	90 ÷ 500	90 ÷ 500	168	200 ÷ 2400
BWT 1701210 HK	12	100	110 ÷ 160	110 ÷ 500	110 ÷ 500	168	200 ÷ 2400
BWT 1701215 HK	12	150	110 ÷ 210	110 ÷ 500	110 ÷ 500	168	200 ÷ 2400
BWT 1701220 HK	12	200	110 ÷ 270	110 ÷ 500	110 ÷ 500	168	200 ÷ 2400
BWT 1701225 HK	12	250	110 ÷ 340	110 ÷ 500	110 ÷ 500	168	200 ÷ 2400
BWT 1900815 HK	8	150	70 ÷ 470	70 ÷ 500	70 ÷ 500	186	200 ÷ 2400
BWT 1900820 HK	8	200	70 ÷ 560	70 ÷ 500	70 ÷ 500	186	200 ÷ 2400
BWT 1900825 HK	8	250	70 ÷ 600	70 ÷ 500	70 ÷ 500	186	200 ÷ 2400
BWT 1901010 HK	10	100	90 ÷ 330	90 ÷ 500	90 ÷ 500	186	200 ÷ 2400
BWT 1901015 HK	10	150	90 ÷ 350	90 ÷ 500	90 ÷ 500	186	200 ÷ 2400
BWT 1901020 HK	10	200	90 ÷ 470	90 ÷ 500	90 ÷ 500	186	200 ÷ 2400
BWT 1901025 HK	10	250	90 ÷ 530	90 ÷ 500	90 ÷ 500	186	200 ÷ 2400
BWT 1901210 HK	12	100	110 ÷ 210	110 ÷ 500	110 ÷ 500	186	200 ÷ 2400
BWT 1901215 HK	12	150	110 ÷ 270	110 ÷ 500	110 ÷ 500	186	200 ÷ 2400
BWT 1901220 HK	12	200	110 ÷ 330	110 ÷ 500	110 ÷ 500	186	200 ÷ 2400
BWT 1901225 HK	12	250	110 ÷ 420	110 ÷ 500	110 ÷ 500	186	200 ÷ 2400
BWT 2200815 HK	8	150	70 ÷ 600	70 ÷ 500	70 ÷ 500	222	200 ÷ 2400
BWT 2200820 HK	8	200	70 ÷ 600	70 ÷ 500	70 ÷ 500	222	200 ÷ 2400
BWT 2200825 HK	8	250	70 ÷ 600	70 ÷ 500	70 ÷ 500	222	200 ÷ 2400
BWT 2201010 HK	10	100	90 ÷ 510	90 ÷ 500	90 ÷ 500	222	200 ÷ 2400
BWT 2201015 HK	10	150	90 ÷ 600	90 ÷ 500	90 ÷ 500	222	200 ÷ 2400
BWT 2201020 HK	10	200	90 ÷ 600	90 ÷ 500	90 ÷ 500	222	200 ÷ 2400
BWT 2201025 HK	10	250	90 ÷ 600	90 ÷ 500	90 ÷ 500	222	200 ÷ 2400
BWT 2201210 HK	12	100	110 ÷ 370	110 ÷ 500	110 ÷ 500	222	200 ÷ 2400
BWT 2201215 HK	12	150	110 ÷ 490	110 ÷ 500	110 ÷ 500	222	200 ÷ 2400
BWT 2201220 HK	12	200	110 ÷ 560	110 ÷ 500	110 ÷ 500	222	200 ÷ 2400
BWT 2201225 HK	12	250	110 ÷ 600	110 ÷ 500	110 ÷ 500	222	200 ÷ 2400
BWT 2400815 HK	8	150	70 ÷ 600	70 ÷ 500	70 ÷ 500	242	200 ÷ 2400
BWT 2400820 HK	8	200	70 ÷ 600	70 ÷ 500	70 ÷ 500	242	200 ÷ 2400
BWT 2400825 HK	8	250	70 ÷ 600	70 ÷ 500	70 ÷ 500	242	200 ÷ 2400
BWT 2401010 HK	10	100	90 ÷ 600	90 ÷ 500	90 ÷ 500	242	200 ÷ 2400
BWT 2401015 HK	10	150	90 ÷ 600	90 ÷ 500	90 ÷ 500	242	200 ÷ 2400

Oznaczenie elementu	Średnica pręta	Rozstaw prętów T, mm	lu, mm	h, mm	v, v ₁ , mm	Szerokość szyny S, mm	Długość szyny L, mm
1	2	3	4	5	6	7	8
BWT 2401020 HK	10	200	90 ÷ 600	90 ÷ 500	90 ÷ 500	242	200 ÷ 2400
BWT 2401025 HK	10	250	90 ÷ 600	90 ÷ 500	90 ÷ 500	242	200 ÷ 2400
BWT 2401210 HK	12	100	110 ÷ 470	110 ÷ 500	110 ÷ 500	242	200 ÷ 2400
BWT 2401215 HK	12	150	110 ÷ 600	110 ÷ 500	110 ÷ 500	242	200 ÷ 2400
BWT 2401220 HK	12	200	110 ÷ 600	110 ÷ 500	110 ÷ 500	242	200 ÷ 2400
BWT 2401225 HK	12	250	110 ÷ 600	110 ÷ 500	110 ÷ 500	242	200 ÷ 2400
Dopuszczalne odchyłki wymiarów:	–	± 5 mm	± 20 mm	± 15 mm	± 15 mm	± 5 mm	± 20 mm

BWB technology