


Wymiary prętowych elementów łączących niestandardowych typ L – BWT

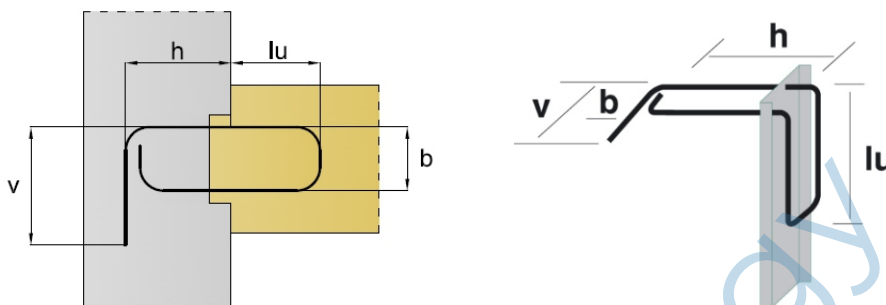

| Oznaczenie elementu | Średnica pręta | Rozstaw prętów T, mm | lu, mm | h, mm | b, mm | v, mm | Szerokość szyny S, mm | Długość szyny L, mm |
|---------------------|----------------|----------------------|-----------|-----------|-------|-----------|-----------------------|---------------------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| BWT 1200815 HL | 8 | 150 | 70 ÷ 175 | 70 ÷ 500 | 88 | 70 ÷ 500 | 122 | 200 ÷ 2400 |
| BWT 1200820 HL | 8 | 200 | 70 ÷ 235 | 70 ÷ 500 | 88 | 70 ÷ 500 | 122 | 200 ÷ 2400 |
| BWT 1200825 HL | 8 | 250 | 70 ÷ 290 | 70 ÷ 500 | 88 | 70 ÷ 500 | 122 | 200 ÷ 2400 |
| BWT 1201015 HL | 10 | 150 | 90 ÷ 130 | 90 ÷ 500 | 90 | 90 ÷ 500 | 122 | 200 ÷ 2400 |
| BWT 1201020 HL | 10 | 200 | 90 ÷ 180 | 90 ÷ 500 | 90 | 90 ÷ 500 | 122 | 200 ÷ 2400 |
| BWT 1201025 HL | 10 | 250 | 90 ÷ 230 | 90 ÷ 500 | 90 | 90 ÷ 500 | 122 | 200 ÷ 2400 |
| BWT 1201215 HL | 12 | 150 | 110 ÷ 120 | 110 ÷ 500 | 92 | 110 ÷ 500 | 122 | 200 ÷ 2400 |
| BWT 1201220 HL | 12 | 200 | 110 ÷ 170 | 110 ÷ 500 | 92 | 110 ÷ 500 | 122 | 200 ÷ 2400 |
| BWT 1201225 HL | 12 | 250 | 110 ÷ 220 | 110 ÷ 500 | 92 | 110 ÷ 500 | 122 | 200 ÷ 2400 |
| BWT 1500815 HL | 8 | 150 | 70 ÷ 280 | 70 ÷ 500 | 116 | 70 ÷ 500 | 150 | 200 ÷ 2400 |
| BWT 1500820 HL | 8 | 200 | 70 ÷ 340 | 70 ÷ 500 | 116 | 70 ÷ 500 | 150 | 200 ÷ 2400 |
| BWT 1500825 HL | 8 | 250 | 70 ÷ 410 | 70 ÷ 500 | 116 | 70 ÷ 500 | 150 | 200 ÷ 2400 |
| BWT 1501010 HL | 10 | 100 | 90 ÷ 160 | 90 ÷ 500 | 118 | 90 ÷ 500 | 150 | 200 ÷ 2400 |
| BWT 1501015 HL | 10 | 150 | 90 ÷ 250 | 90 ÷ 500 | 118 | 90 ÷ 500 | 150 | 200 ÷ 2400 |
| BWT 1501020 HL | 10 | 200 | 90 ÷ 260 | 90 ÷ 500 | 118 | 90 ÷ 500 | 150 | 200 ÷ 2400 |
| BWT 1501025 HL | 10 | 250 | 90 ÷ 320 | 90 ÷ 500 | 118 | 90 ÷ 500 | 150 | 200 ÷ 2400 |
| BWT 1501210 HL | 12 | 100 | 110 | 110 ÷ 500 | 120 | 110 ÷ 500 | 150 | 200 ÷ 2400 |
| BWT 1501215 HL | 12 | 150 | 110 ÷ 155 | 110 ÷ 500 | 120 | 110 ÷ 500 | 150 | 200 ÷ 2400 |
| BWT 1501220 HL | 12 | 200 | 110 ÷ 210 | 110 ÷ 500 | 120 | 110 ÷ 500 | 150 | 200 ÷ 2400 |
| BWT 1501225 HL | 12 | 250 | 110 ÷ 260 | 110 ÷ 500 | 120 | 110 ÷ 500 | 150 | 200 ÷ 2400 |
| BWT 1700815 HL | 8 | 150 | 70 ÷ 375 | 70 ÷ 500 | 134 | 70 ÷ 500 | 168 | 200 ÷ 2400 |
| BWT 1700820 HL | 8 | 200 | 70 ÷ 450 | 70 ÷ 500 | 134 | 70 ÷ 500 | 168 | 200 ÷ 2400 |
| BWT 1700825 HL | 8 | 250 | 70 ÷ 505 | 70 ÷ 500 | 134 | 70 ÷ 500 | 168 | 200 ÷ 2400 |

| Oznaczenie elementu | Średnica pręta | Rozstaw prętów T, mm | lu, mm | h, mm | b, mm | v, mm | Szerokość szyny S, mm | Długość szyny L, mm |
|---------------------|----------------|----------------------|-----------|-----------|-------|-----------|-----------------------|---------------------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| BWT 1701010 HL | 10 | 100 | 90 ÷ 245 | 90 ÷ 500 | 136 | 90 ÷ 500 | 168 | 200 ÷ 2400 |
| BWT 1701015 HL | 10 | 150 | 90 ÷ 300 | 90 ÷ 500 | 136 | 90 ÷ 500 | 168 | 200 ÷ 2400 |
| BWT 1701020 HL | 10 | 200 | 90 ÷ 365 | 90 ÷ 500 | 136 | 90 ÷ 500 | 168 | 200 ÷ 2400 |
| BWT 1701025 HL | 10 | 250 | 90 ÷ 425 | 90 ÷ 500 | 136 | 90 ÷ 500 | 168 | 200 ÷ 2400 |
| BWT 1701210 HL | 12 | 100 | 110 ÷ 160 | 110 ÷ 500 | 136 | 110 ÷ 500 | 168 | 200 ÷ 2400 |
| BWT 1701215 HL | 12 | 150 | 110 ÷ 210 | 110 ÷ 500 | 138 | 110 ÷ 500 | 168 | 200 ÷ 2400 |
| BWT 1701220 HL | 12 | 200 | 110 ÷ 270 | 110 ÷ 500 | 138 | 110 ÷ 500 | 168 | 200 ÷ 2400 |
| BWT 1701225 HL | 12 | 250 | 110 ÷ 340 | 110 ÷ 500 | 138 | 110 ÷ 500 | 168 | 200 ÷ 2400 |
| BWT 1900815 HL | 8 | 150 | 70 ÷ 470 | 70 ÷ 500 | 152 | 70 ÷ 500 | 186 | 200 ÷ 2400 |
| BWT 1900820 HL | 8 | 200 | 70 ÷ 560 | 70 ÷ 500 | 152 | 70 ÷ 500 | 186 | 200 ÷ 2400 |
| BWT 1900825 HL | 8 | 250 | 70 ÷ 600 | 70 ÷ 500 | 152 | 70 ÷ 500 | 186 | 200 ÷ 2400 |
| BWT 1901010 HL | 10 | 100 | 90 ÷ 330 | 90 ÷ 500 | 154 | 90 ÷ 500 | 186 | 200 ÷ 2400 |
| BWT 1901015 HL | 10 | 150 | 90 ÷ 350 | 90 ÷ 500 | 154 | 90 ÷ 500 | 186 | 200 ÷ 2400 |
| BWT 1901020 HL | 10 | 200 | 90 ÷ 470 | 90 ÷ 500 | 154 | 90 ÷ 500 | 186 | 200 ÷ 2400 |
| BWT 1901025 HL | 10 | 250 | 90 ÷ 530 | 90 ÷ 500 | 154 | 90 ÷ 500 | 186 | 200 ÷ 2400 |
| BWT 1901210 HL | 12 | 100 | 110 ÷ 210 | 110 ÷ 500 | 156 | 110 ÷ 500 | 186 | 200 ÷ 2400 |
| BWT 1901215 HL | 12 | 150 | 110 ÷ 270 | 110 ÷ 500 | 156 | 110 ÷ 500 | 186 | 200 ÷ 2400 |
| BWT 1901220 HL | 12 | 200 | 110 ÷ 330 | 110 ÷ 500 | 156 | 110 ÷ 500 | 186 | 200 ÷ 2400 |
| BWT 1901225 HL | 12 | 250 | 110 ÷ 420 | 110 ÷ 500 | 156 | 110 ÷ 500 | 186 | 200 ÷ 2400 |
| BWT 2200815 HL | 8 | 150 | 70 ÷ 600 | 70 ÷ 500 | 188 | 70 ÷ 500 | 222 | 200 ÷ 2400 |
| BWT 2200820 HL | 8 | 200 | 70 ÷ 600 | 70 ÷ 500 | 188 | 70 ÷ 500 | 222 | 200 ÷ 2400 |
| BWT 2200825 HL | 8 | 250 | 70 ÷ 600 | 70 ÷ 500 | 188 | 70 ÷ 500 | 222 | 200 ÷ 2400 |
| BWT 2201010 HL | 10 | 100 | 90 ÷ 510 | 90 ÷ 500 | 190 | 90 ÷ 500 | 222 | 200 ÷ 2400 |
| BWT 2201015 HL | 10 | 150 | 90 ÷ 600 | 90 ÷ 500 | 190 | 90 ÷ 500 | 222 | 200 ÷ 2400 |
| BWT 2201020 HL | 10 | 200 | 90 ÷ 600 | 90 ÷ 500 | 190 | 90 ÷ 500 | 222 | 200 ÷ 2400 |
| BWT 2201025 HL | 10 | 250 | 90 ÷ 600 | 90 ÷ 500 | 190 | 90 ÷ 500 | 222 | 200 ÷ 2400 |
| BWT 2201210 HL | 12 | 100 | 110 ÷ 370 | 110 ÷ 500 | 192 | 110 ÷ 500 | 222 | 200 ÷ 2400 |
| BWT 2201215 HL | 12 | 150 | 110 ÷ 490 | 110 ÷ 500 | 192 | 110 ÷ 500 | 222 | 200 ÷ 2400 |
| BWT 2201220 HL | 12 | 200 | 110 ÷ 560 | 110 ÷ 500 | 192 | 110 ÷ 500 | 222 | 200 ÷ 2400 |
| BWT 2201225 HL | 12 | 250 | 110 ÷ 600 | 110 ÷ 500 | 192 | 110 ÷ 500 | 222 | 200 ÷ 2400 |
| BWT 2400815 HL | 8 | 150 | 70 ÷ 600 | 70 ÷ 500 | 208 | 70 ÷ 500 | 242 | 200 ÷ 2400 |
| BWT 2400820 HL | 8 | 200 | 70 ÷ 600 | 70 ÷ 500 | 208 | 70 ÷ 500 | 242 | 200 ÷ 2400 |
| BWT 2400825 HL | 8 | 250 | 70 ÷ 600 | 70 ÷ 500 | 208 | 70 ÷ 500 | 242 | 200 ÷ 2400 |
| BWT 2401010 HL | 10 | 100 | 90 ÷ 600 | 90 ÷ 500 | 210 | 90 ÷ 500 | 242 | 200 ÷ 2400 |
| BWT 2401015 HL | 10 | 150 | 90 ÷ 600 | 90 ÷ 500 | 210 | 90 ÷ 500 | 242 | 200 ÷ 2400 |
| BWT 2401020 HL | 10 | 200 | 90 ÷ 600 | 90 ÷ 500 | 210 | 90 ÷ 500 | 242 | 200 ÷ 2400 |

| Oznaczenie elementu | Średnica pręta | Rozstaw prętów T, mm | lu, mm | h, mm | b, mm | v, mm | Szerokość szyny S, mm | Długość szyny L, mm |
|--|----------------|----------------------|-----------|-----------|---------|-----------|-----------------------|---------------------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| BWT 2401025 HL | 10 | 250 | 90 ÷ 600 | 90 ÷ 500 | 210 | 90 ÷ 500 | 242 | 200 ÷ 2400 |
| BWT 2401210 HL | 12 | 100 | 110 ÷ 470 | 110 ÷ 500 | 212 | 110 ÷ 500 | 242 | 200 ÷ 2400 |
| BWT 2401215 HL | 12 | 150 | 110 ÷ 600 | 110 ÷ 500 | 212 | 110 ÷ 500 | 242 | 200 ÷ 2400 |
| BWT 2401220 HL | 12 | 200 | 110 ÷ 600 | 110 ÷ 500 | 212 | 110 ÷ 500 | 242 | 200 ÷ 2400 |
| BWT 2401225 HL | 12 | 250 | 110 ÷ 600 | 110 ÷ 500 | 212 | 110 ÷ 500 | 242 | 200 ÷ 2400 |
| Dopuszczalne odchyłki wymiarów: | – | ± 5 mm | ± 20 mm | ± 15 mm | ± 15 mm | ± 15 mm | ± 5 mm | ± 20 mm |

BWB technology