


Wymiary prętowych elementów łączących niestandardowych typ M – BWT

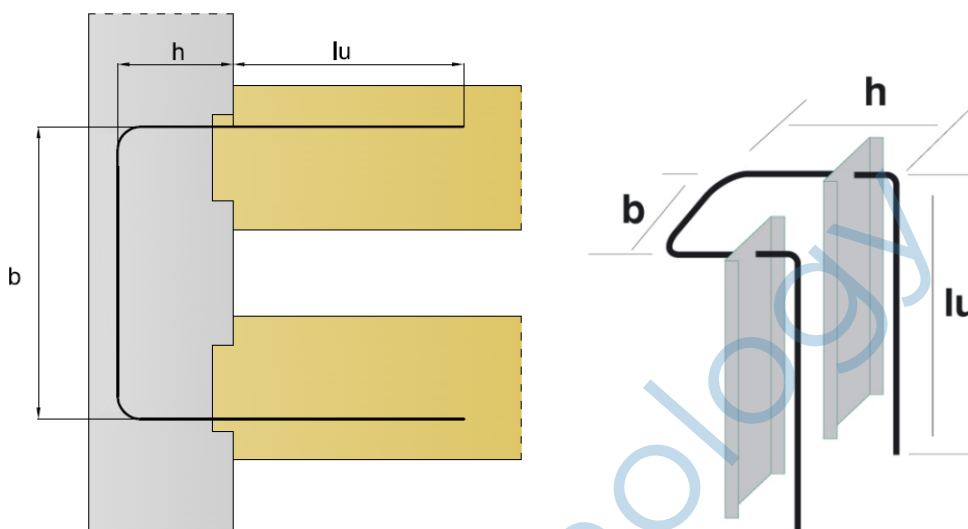

Oznaczenie elementu	Średnica pręta	Rozstaw prętów T, mm	lu, mm	h, mm	b, mm	Szerokość szyny S, mm	Długość szyny L, mm
1	2	3	4	5	6	8	9
BWT 550815 HM	8	150	70 ÷ 510	70 ÷ 350	200 ÷ 500	2 x 58	200 ÷ 2400
BWT 550820 HM	8	200	70 ÷ 600	70 ÷ 450	200 ÷ 500	2 x 58	200 ÷ 2400
BWT 550825 HM	8	250	70 ÷ 600	70 ÷ 550	200 ÷ 500	2 x 58	200 ÷ 2400
BWT 551015 HM	10	150	90 ÷ 390	90 ÷ 350	200 ÷ 500	2 x 58	200 ÷ 2400
BWT 551020 HM	10	200	90 ÷ 510	90 ÷ 450	200 ÷ 500	2 x 58	200 ÷ 2400
BWT 551025 HM	10	250	90 ÷ 510	90 ÷ 550	200 ÷ 500	2 x 58	200 ÷ 2400
BWT 851010 HM	10	100	90 ÷ 430	90 ÷ 250	200 ÷ 500	2 x 86	200 ÷ 2400
BWT 851015 HM	10	150	90 ÷ 510	90 ÷ 350	200 ÷ 500	2 x 86	200 ÷ 2400
BWT 851020 HM	10	200	90 ÷ 600	90 ÷ 450	200 ÷ 500	2 x 86	200 ÷ 2400
BWT 851025 HM	10	250	90 ÷ 600	90 ÷ 550	200 ÷ 500	2 x 86	200 ÷ 2400
BWT 851210 HM	12	100	110 ÷ 430	110 ÷ 250	200 ÷ 500	2 x 86	200 ÷ 2400
BWT 851215 HM	12	150	110 ÷ 510	110 ÷ 350	200 ÷ 500	2 x 86	200 ÷ 2400
BWT 851220 HM	12	200	110 ÷ 600	110 ÷ 450	200 ÷ 500	2 x 86	200 ÷ 2400
BWT 851225 HM	12	250	110 ÷ 600	110 ÷ 550	200 ÷ 500	2 x 86	200 ÷ 2400
Dopuszczalne odchyłki wymiarów:	–	± 5 mm	± 20 mm	± 15 mm	± 15 mm	± 5 mm	± 20 mm